



Value. Efficiency. Promise. Entrust your home to Hearthstone.

SOAPSTONE



Equinox 6

Mansfield 8

Phoenix 10

Heritage 12

Homestead 14

Castleton

16

CAST IRON



22





Bari 32

2 | HEARTHSTONE WOOD COLLECTION

Tribute 18


Manchester Shelburne 20

Craftsbury 24

Clydesdale 26

Morgan 28

Montgomery 30



Enduring Value

A Hearthstone speaks of quality and commitment. Integrating superior materials and high-end design, a Hearthstone provides you with value, efficiency, and promise. We handcraft each Hearthstone with assurance and commitment to meet the highest standards. Time-tested craftsmanship, the finest materials, and advanced heating technology guarantee that your Hearthstone is clean-burning and efficient.

That's value.





Lima 34



Tula 36

PELLET



Manchester Pellet 38

Heritage Pellet 40

COOK



Deva 42

HEARTHSTONE WOOD COLLECTION | 3







True Efficiency

The efficiency is found in our soft, enduring warmth. This long-lasting warmth is HeatLife – the ability to emanate a steady,

radiant heat. Hearthstone HeatLife is superior. A Hearthstone generates a consistent heat that keeps your home warm longer.


The secret is in soapstone – soapstone naturally absorbs the heat of your fire, stores that heat, and then radiates it evenly throughout your home. We use soapstone so you enjoy soft, stable, and efficient heat - long after the fire is out.

We balance the natural heating qualities of soapstone with our clean-burning secondary combustion system. We use a passive, self-regulating system that ensures your Hearthstone burns as clean as possible, at whatever rate you're burning.

All Hearthstone wood and pellet stoves are EPA certified and are among the cleanest burning – if not the cleanest burning – biomass fuel models available.

No fuss. Little maintenance. With one lever, you control the burn rate. Your Hearthstone burns cleanly and effectively on any setting. Ultimately, you use less wood and enjoy a relaxing heat. That's efficiency.

SOAPSTONE STOVES VS. CAST IRON & STEEL

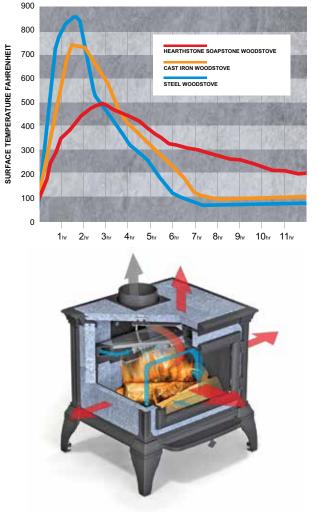

Our Promise

For more than 35 years, dedicated Vermont craftsmen have been committed to building quality stoves. It's our commitment – our guarantee – that each Hearthstone is built with integrity in the Hearthstone tradition. Hearthstone continues to meet its promise of value, efficiency, and unmatched appeal. Your Hearthstone will serve you faithfully for years to come.

That's our promise.



Every Hearthstone soapstone stove is signed by the stove builder.




EQUINOX SOAPSTONE WOODSTOVE




Equinox featured in Matte Black with left side door.

A POWERHOUSE TO HEAT THE MOST GENEROUS LIVING SPACES

Our largest soapstone stove, the Equinox possesses the strength to heat your entire home. Pack the generous firebox and enjoy an unmatched, long-lasting HeatLife - true of only a Hearthstone.

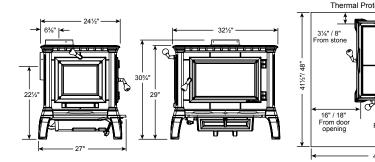




- Right or left side load door flexible installation
- Oven-style side load door helps keep ashes in firebox
- Top or rear flue exit flexible installation
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

SPECIFICATIONS

Heats up to	.3,500 sq ft
Firebox Capacity	.4.0 cu ft
Size	.Up to 120,000 BTUs
EPA Certified	.3.1 gph
Efficiency	.82% LHV
Burn Time	.Up to 12 hours
HeatLife	.Up to 16 hours
Maximum Log Length	.25" Left-Right, 20" Front-Back
Flue Exit & Diameter	.Top or Rear - 8"
Ash Pan	Included
Side Load Door	.Choose Left or Right
Side Door Lock Kit	.Optional
Convection Blower	.Optional
Rear Heat Shield	.Optional
Outside Air Adapter	.Optional
Actual Weight	.689 lbs.
Alcove Certified	.Yes
Mobile Home Certified	.Yes

CLEARANCES TO COMBUSTIBLE MATERIALS






	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
А	21″	19" *
В	21″	6″
С	26¾″	11¾″
D	15″	13½″ *
Е	30¾″	287⁄8″ *

* Non-door side -or- locked side door

Minimum Hearth Protection US/Canada: Thermal Protection: R-value 1.0




MANSFIELD SOAPSTONE WOODSTOVE




Mansfield featured in Matte Black.

RELAXED GOOD LOOKS THAT DELIVER LASTING WHOLE-HOUSE WARMTH

A true workhorse, the Mansfield is a top-seller among hearth professionals. Providing up to 14 hours of sustained heat on a single load of wood, the Mansfield delivers comfortable warmth throughout your home.

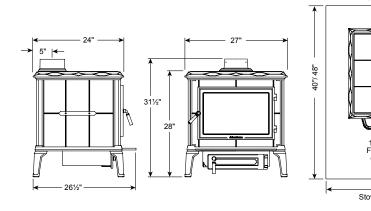




MANSFIELD 8012 FEATURES AND BENEFITS


- Deep firebox easy to load front-to-back, and sideto-side
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

SPECIFICATIONS

Heats up to	2,500 sq ft
Firebox Capacity	3.2 cu ft
Size	Up to 80,000 BTUs
EPA Certified	2.9 gph
Efficiency	77.4%
Burn Time	Up to 10 hours
HeatLife	Up to 14 hours
Maximum Log Length	21" Left-Right, 19" Front-Back
Flue Exit & Diameter	Top - 6″
Flue Exit & Diameter Ash Pan	•
	Included
Ash Pan	.Included .Optional
Ash Pan Convection Blower	Included Optional Optional
Ash Pan Convection Blower Rear Heat Shield	Included Optional Optional Included
Ash Pan Convection Blower Rear Heat Shield Outside Air Adapter	Included Optional Optional Included 550 lbs.

CLEARANCES TO COMBUSTIBLE MATERIALS





	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
А	18″	18″
В	19″	8″
С	24"	13″
D	14″	14″
Е	27"	27″

HEARTHSTONE WOOD COLLECTION | 9


PHOENIX SOAPSTONE WOODSTOVE



Phoenix featured in Matte Black and Polished Soapstone.

QUICK HEAT OF CAST IRON **RADIANT HEAT OF SOAPSTONE**


Highlighting a hybrid design, the Phoenix combines the quick-heating qualities of a solid cast iron front and back with the radiant heat of natural soapstone for quick, lasting warmth. Compact, yet powerful, the Phoenix warms your midsize home for hours.



Note: Shown with 45° elbow stovepipe, not included with stove



Minimum Hearth Protection US/Canada: Thermal Protection: R-value 1.0





PHOENIX 8612 FEATURES AND BENEFITS

- · Cast iron and soapstone hybrid construction - quick and lasting heat
- 45 degree flue collar flexible installation (freestanding or hearthmount stove)
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

SPECIFICATIONS

Heats up to	2,000 sq ft
Firebox Capacity	2.2 cu ft
Size	60,000 BTUs
EPA Certified	2.4 gph
Efficiency	75% LHV
Burn Time	Up to 8 hours
HeatLife	Up to 12 hours
Maximum Log Length	21″
Flue Exit & Diameter	Reversible 45° collar - 6"
Ash Pan	Included
Rear Heat Shield	Optional
Outside Air Adapter	Optional
Actual Weight	425 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes





	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
А	20″	16″
В	25″	13″
С	25½"	13½″
D	18″	12″
Е	27¼"	21¼″


HERITAGE SOAPSTONE WOODSTOVE



Heritage featured in Matte Black, shown with optional ash pan and rear heat shield.

OUR SIGNATURE PRODUCT THE HERITAGE DELIVERS

Crafted in the tradition of Hearthstone innovation, the Heritage provides the enduring comfort of soapstone with side-loading capability and sustained heat for up to 12 hours. Our heirloom quality product will be the focal point of the room.




12 | HEARTHSTONE WOOD COLLECTION












HERITAGE 8022 FEATURES AND BENEFITS

- Left side load or right side load front door coordinated with side door for flexible installation
- Oven-style side load door helps keep ashes in firebox
- Top or rear flue exit flexible installation
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Optional Ash Pan easy to clean, easily accessible

SPECIFICATIONS

Heats up to	1,900 sq ft
Firebox Capacity	2.3 cu ft
Size	Up to 55,000 BTUs
EPA Certified	2.8 gph
Efficiency	81% LHV
Burn Time	Up to 8 hours
HeatLife	Up to 12 hours
Maximum Log Length	21″
Flue Exit & Diameter	Top or Rear - 6″
Ash Pan	.Optional
Side Load Door	Included
Convection Blower	.Optional
Rear Heat Shield	Optional
Outside Air Adapter	Optional
Actual Weight	475 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes

CLEARANCES TO COMBUSTIBLE MATERIALS





	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
А	17″	15″ *
В	16″	7"
С	21″	12″
D	12″	11″ *
Е	25½"	241⁄2" *


* Non-door side -or- locked side door

HOMESTEAD SOAPSTONE WOODSTOVE




OUR CLEANEST BURNING STOVE FREESTANDING OR HEARTHMOUNT

Efficient and versatile, the Homestead keeps your midsize home cozy. One of the most efficient woodstoves on the market, the Homestead lends gentle radiant heat for lasting warmth you'll enjoy all day long.









HOMESTEAD 8570 FEATURES AND BENEFITS

- Flexible installation available as freestanding or hearthmount stove
- Low flue exit uniquely designed as an 'outsert'
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan- easy to clean, easily accessible

SPECIFICATIONS

Heats up to	1,800 sq ft
Firebox Capacity	2.0 cu ft
Size	Up to 50,000 BTUs
EPA Certified	1.9 gph
Efficiency	83.5% LHV
Burn Time	Up to 8 hours
HeatLife	Up to 12 hours
Maximum Log Length	21″
Flue Exit & Diameter	Top or Rear - 6"
Ash Pan	Included
Convection Blower	Optional
Rear Heat Shield	Optional
Outside Air Adapter	Optional
Hearth Surround	Optional
Actual Weight	380 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes





	Single-wall pipe, no rear heat shield		Double-wall pipe, with rear heat shield	
	H-M	F-S	H-M	F-S
А	23″	23″	16″	16″
В	26″	26″	7″	7"
С	N/A	281⁄2″	N/A	9½"
D	18″	18″	12″	12″
Е	N/A	27¼″	N/A	21¼″


CASTLETON SOAPSTONE WOODSTOVE




Castleton featured with Brown Majolica Enamel finish.

CLASSIC STYLE WITH THE ESSENTIALS

The Castleton gives you the heating qualities of soapstone and the detailing of fine cast iron. Designed to maintain a warm, consistent heat, the Castleton is simple, reliable, affordable, and beautiful.

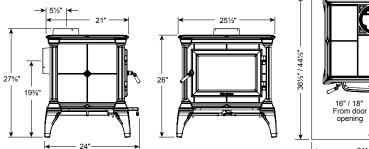

Minimum Hearth Protection US/Canada: Ember Protection Only





CASTLETON 8030 FEATURES AND BENEFITS

- Cast iron interior impact plates protect the soapstone when loading the stove
- Top or rear flue exit flexible installation
- · Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up

SPECIFICATIONS


Heats up to	.1,500 sq ft
Firebox Capacity	.1.9 cu ft
Size	.Up to 45,000 BTUs
EPA Certified	2.7 gph
Efficiency	78% LHV
Burn Time	.Up to 8 hours
HeatLife	.Up to 10 hours
Maximum Log Length	18″
Flue Exit & Diameter	.Top or Rear - 6"
Rear Heat Shield	.Optional
Convection Blower	.Optional
Outside Air Adapter	.Optional
Actual Weight	464 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes





	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
А	20″	15″
В	18″	6″
С	23″	11″
D	10″	10″
Е	23″	23"

TRIBUTE SOAPSTONE WOODSTOVE

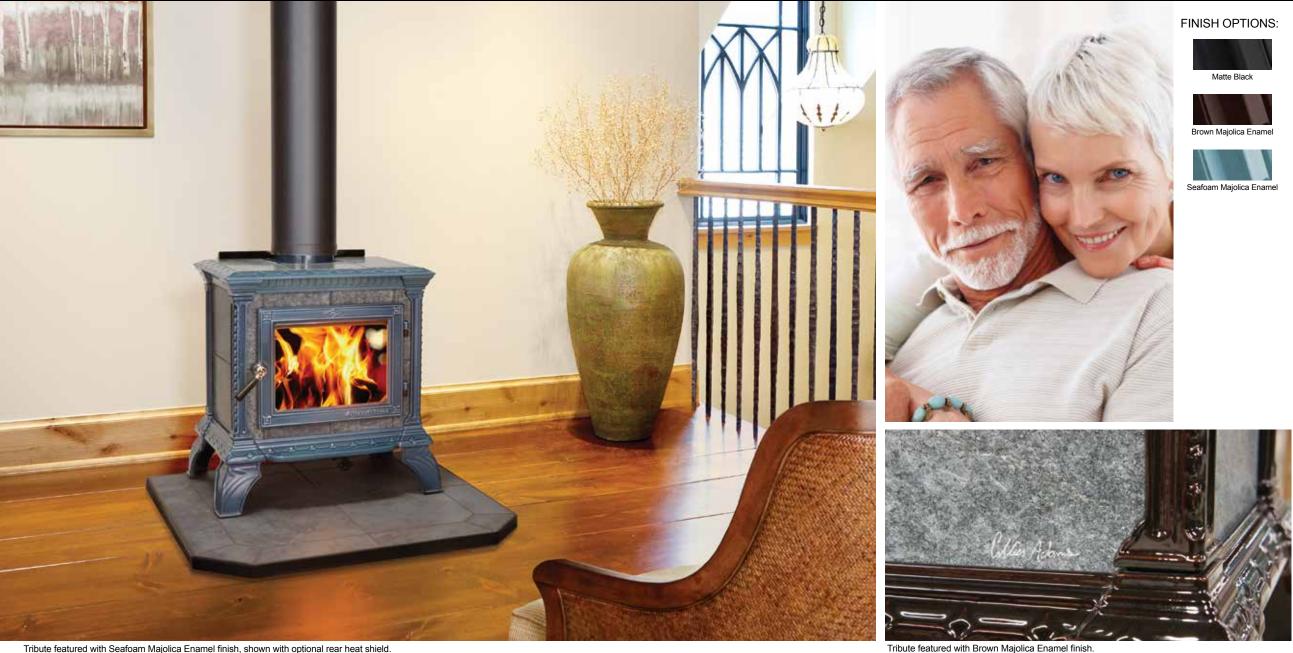

Tribute featured with Seafoam Majolica Enamel finish, shown with optional rear heat shield.


BEAUTIFUL SOAPSTONE, SCALED TO WARM A MORE MODERATE SPACE

Perfect for a large room or a smaller home, the Tribute will burn for up to 5 hours – so you enjoy 7 hours of HeatLife. The Tribute delivers Hearthstone quality and efficiency at an attractive price point.



_____ 28⁷/₈" / 38" ____ Stove centered on pad







TRIBUTE 8040 FEATURES AND BENEFITS

- Compact size adapts to smaller spaces
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up

SPECIFICATIONS

Heats up to	1,000 sq ft
Firebox Capacity	1.2 cu ft
Size	Up to 36,000 BTUs
EPA Certified	3.0 gph
Efficiency	80% LHV
Burn Time	Up to 5 hours
HeatLife	Up to 7 hours
Maximum Log Length	16″
Flue Exit & Diameter	6″ top exit
Convection Blower	Optional
Rear Heat Shield	Optional
Spark Screen	Optional
Outside Air Adapter	Optional
Actual Weight	318 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes





	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
А	16½″	16½″
В	19″	8″
С	24″	13″
D	17″	7"
Е	28½"	18½"


MANCHESTER CAST IRON WOODSTOVE



Manchester featured with Brown Majolica Enamel finish.

FOR EFFICIENT, TOASTY WHOLE-HOME HEAT

Clean-burning, efficient, and versatile, the Manchester presents Hearthstone performance in cast iron style. Using a convection air system with an integrated cast iron heat exchanger, the Manchester provides extraordinary heating efficiency for your home. A soapstone-lined firebox captures and stores heat, so you enjoy a longer HeatLife.

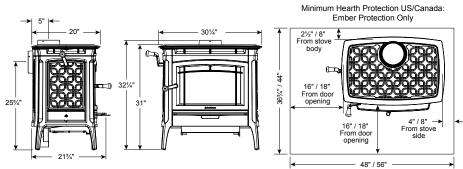




MANCHESTER 8360 FEATURES AND BENEFITS

- Soapstone-lined interior extended HeatLife
- · Right or left side door flexible installation
- Oven-style side door helps keep ashes in firebox
- · Convection air channel with heat exchanger encourages airflow, moves heat throughout home
- Decorative cast rear heat shield Finished look from any angle
- Top or rear flue exit flexible installation
- Single lever stove control easy operation, consistent performance
- · Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

SPECIFICATIONS

Heats up to	2,400 sq ft
Firebox Capacity	2.9 cu ft
Size	Up to 78,000 BTUs
EPA Certified	3.0 gph
Efficiency	80% LHV
Burn Time	Up to 12 hours
HeatLife	Up to 14 hours
Maximum Log Length	24″
Flue Exit & Diameter	Top or Rear - 6"
Ash Pan	Included
Convection Blower	Optional
Side Load Door	Choose Left or Right
Rear Heat Shield	Included
Close Clearance Heat Shield	Optional
Outside Air Adapter	Optional
Actual Weight	515 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes

CLEARANCES TO COMBUSTIBLE MATERIALS





_
_

* Non-door side -or- locked side door

HEARTHSTONE WOOD COLLECTION | 21


SHELBURNE CAST IRON WOODSTOVE



Shelburne featured in Matte Black

THE TRADITIONAL BEAUTY OF CAST IRON IN YOUR HOME

A generous heating capacity allows the Shelburne to heat large areas of your home with ease. Traditional cast iron style is complemented by functionality: a soapstone-lined firebox extends the HeatLife; an oversized self-cleaning window makes loading easy and enhances your fire viewing. The Shelburne delivers Hearthstone quality in classic cast iron style.

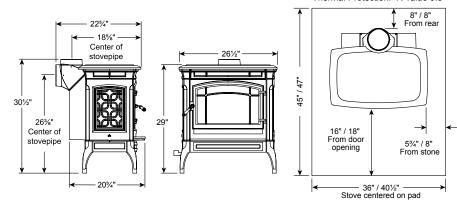


SHELBURNE 8371 FEATURES AND BENEFITS


- Soapstone-lined 2.0 cubic foot firebox extended HeatLife
- Reversible top or rear flue flexible installation (freestanding or hearthmount)
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

SPECIFICATIONS

Heats up to	1,800 sq ft
Firebox Capacity	2.0 cu ft
Size	Up to 60,000 BTUs
EPA Certified	2.1 gph
Efficiency	80% LHV
Burn Time	Up to 8 hours
HeatLife	Up to 10 hours
Maximum Log Length	20″
Flue Exit & Diameter	Top or Rear - 6″
Ash Pan	Included
Convection Blower	Optional
Rear Heat Shield	Optional
Outside Air Adapter	Optional
Actual Weight	400 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes

CLEARANCES TO COMBUSTIBLE MATERIALS





	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
А	18″	21″
В	24″	12″
С	271⁄2″	15½"
D	13″	6″
Е	20″	13″

Minimum Hearth Protection US/Canada: Thermal Protection: R-value 0.8


CRAFTSBURY CAST IRON WOODSTOVE



Craftsbury featured with Basil Majolica Enamel finish.

CLASSIC AND COMPACT WITH THE BENEFIT OF SOAPSTONE

Perfect for a large room or a smaller home, the Craftsbury heats with the classic good looks of embossed cast iron. Offering medium heating capacity and small dimensions, the Craftsbury is remarkably functional and adaptable.

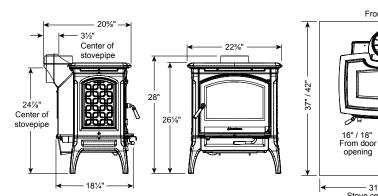

Minimum Hearth Protection US/Canada: Ember Protection Only 5¼" / 8" From body of stove 5¼" / 8" From body of stove


Stove centered on pad


CRAFTSBURY 8391 FEATURES AND BENEFITS

- Soapstone-lined 1.5 cubic foot firebox extended HeatLife
- Reversible top or rear flue flexible installation (freestanding or hearth-mount)
- Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

SPECIFICATIONS

Heats up to	.1,300 sq ft
Firebox Capacity	.1.5 cu ft
Size	.Up to 40,000 BTUs
EPA Certified	3.8 gph
Efficiency	81% LHV
Burn Time	.Up to 6 hours
HeatLife	.Up to 7 hours
Maximum Log Length	17″
Flue Diameter	. Top or Rear - 6"
Ash Pan	Included
Convection Blower	.Optional
Outside Air Adapter	.Optional
Actual Weight	285 lbs.
Alcove Certified	Yes
Mobile Home Certified	Yes





	Single-wall pipe, no rear heat shield	Double-wall pipe, with rear heat shield
А	14″	14″
В	18″	6″
С	21″	9″
D	17″	10″
Е	221/2"	15″


CLYDESDALE WOOD INSERT



Clydesdale featured in Brown Majolica Enamel finish.

TRANSFORM YOUR FIREPLACE INTO A COMFORT SOLUTION

The Clydesdale is the perfect solution for drafty, inefficient fireplaces. The large open viewing area highlights the ambiance of wood burning while the cast iron and soapstone construction generates a heat output sufficient for large areas.

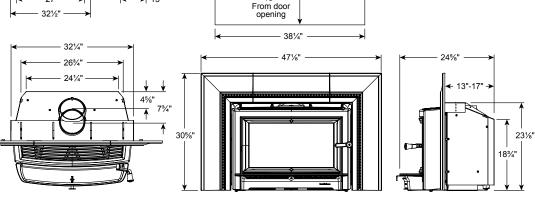

18"

27

→ 13"












CLYDESDALE 8491 FEATURES AND BENEFITS

- · Soapstone-lined firebox extended HeatLife
- Large front door easy loading and great view of the fire
- Cast iron firebox unequalled durability and maximum heat output
- Smooth firebox floor user friendly ash removal
- **Telescoping design –** allows a flush or extended hearth projection
- · Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up

SPECIFICATIONS


Heats up to	.2,000 sq ft
Firebox Capacity	.2.4 cu ft
Size	.75,000 BTUs
EPA Certified	.3.2 gph
Efficiency	.79% (LHV)
Burn Time	.Up to 10 hours
HeatLife	.Up to 12 hours
Maximum Log Length	.22"-24"
Flue Exit & Diameter	.6", 2 positions
Convection Blower	.Included
Spark Screen	.Optional
Surround Extension	.Optional
Surround Base Caps	.Optional
Mantel Shield	.Optional
Actual Weight	.550 lbs.







the thermal mass and HeatLife you expect from a Hearthstone.




MONTGOMERY EPA CERTIFIED WOOD FIREPLACE FOR NEW CONSTRUCTION



THE PERFECT ADDITION TO YOUR HOME

Whether you are building or renovating, the Montgomery enhances your home and offers an efficient alternative to a traditional fireplace. The European cast iron front provides aesthetic appeal, while the latest fireplace technology makes the Montgomery a smart, clean, renewable energy choice.

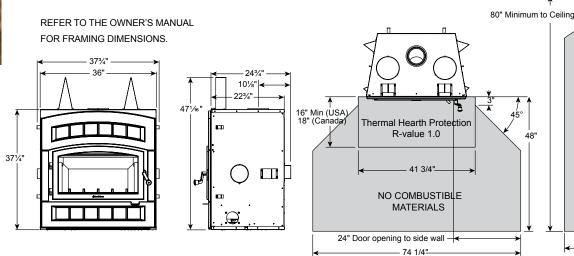

FINISH OPTIONS:








WFP-75 8410 FEATURES AND BENEFITS

- · EPA certified zero clearance fireplace clean burning, efficient
- · Stacked ledgestone interior panel accentuate the chiseled stone appearance of the cast iron front
- Optional vent ducting distribute heat to other rooms
- · Thermostat controlled fans turn on and off automatically
- · Single lever stove control easy operation, consistent performance
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up

SPECIFICATIONS

Heats up to	2,000 sq ft	
Firebox Capacity	2.5 cu ft *	
Size	Up to 75,000 BTUs **	
EPA Certified	4.4 gph	
Efficiency	Up to 77%	
Maximum Log Length	20″	
Flue Exit & Diameter	Top - 6" (7" Optional)	
Type of Chimney	Refer to owner's manual	
Convection Blower	Included	
Spark Screen	Optional	
Gravity Convection Air Kit	Optional	
Forced Air Convection Kit	Optional	
Actual Weight	400 lbs.	
* Maximum firebox capacity, 1.7 cu ft behind the andiron ** BTU input value shown. Output: 8,000 to 40,000 BTUs		








Bari stove featured in Gray Matte with Soapstone. Stove pipe painted gray to match stove.

FINE EUROPEAN DESIGN -AMAZING SPECTACLE OF FIRE

The striking cylindrical shape gives the Bari modern appeal. The soapstone construction provides radiant heat and sustained warmth. To maximize enjoyment, the Bari rotates 180 degrees and provides flame viewing from any spot in the room.

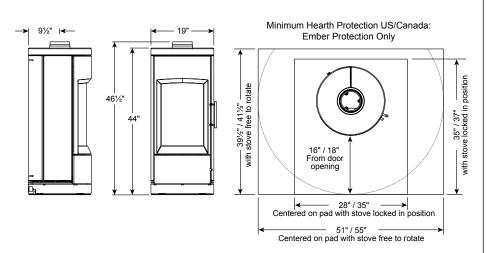

32 | HEARTHSTONE WOOD COLLECTION

BARI 8170 FEATURES AND BENEFITS


· Rotating design maximizes convenience view flames from around the room


- · Soapstone or ceramic tiles store and radiate heat
- Multiple color options special order for personalization
- Generous firebox burn 17" logs vertically
- Double steel wall construction reduced clearances, encourages airflow, moves heat throughout home
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

SPECIFICATIONS

1,400 sq ft
1.5 cu ft
Up to 35,000 BTUs
3.6 gph
80% LHV
Up to 6 hours
17″
Top - 6″
Included
Integral
Optional
180°
475 lbs
Yes
Yes

CLEARANCES TO COMBUSTIBLE MATERIALS





	Single-wall pipe	Double-wall pipe
А	38″	38″
В	17″ *	17″ *
С	261⁄2" *	26½" *
D	12″ **	12" **
Е	21½" **	211⁄2" **

* Stove free to rotate, ** Stove locked in position






Lima stove featured in Black/Lava


STYLE AND EFFICIENCY IN MODERN EUROPEAN DESIGN

The Lima combines style and utility to meet your needs. A ceramic construction delivers pleasing, radiant warmth. A curved glass window provides an amazing view of the fire. Rotate the Lima and extend the fire enjoyment throughout your space.



Centered on pad with stove locked in position - 51" / 55" Centered on pad with stove free to rotate

16" / 18" From door opening



LIMA 8150 FEATURES AND BENEFITS

- · Rotating design maximizes convenience view flames from around the room.
- · Soapstone or ceramic tiles store and radiate heat
- Multiple color options special order for personalization
- Generous firebox burn 17" logs vertically
- · Double steel wall construction reduced clearances, encourages airflow, moves heat throughout home
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan easy to clean, easily accessible

SPECIFICATIONS

Heats up to	1,400 sq ft
Firebox Capacity	1.5 cu ft
Size	Up to 35,000 BTUs
EPA Certified	3.6 gph
Efficiency	80% LHV
Burn Time	Up to 6 hours
Maximum Log Length	17″
Flue Exit & Diameter	Top - 6″
Ash Pan	Included
Rear Heat Shield	Integral
Outside Air Adaptor	Optional
Rotation	180°
Actual Weight	475 lbs
Alcove Certified	Yes
Mobile Home Certified	Yes



	Single-wall pipe	Double-wall pipe
Α	38″	38″
В	17″ *	17″ *
С	26½" *	261⁄2" *
D	12" **	12" **
E	211⁄2″ **	21½" **
	* Otava fasa ta astata	1 1 1

* Stove free to rotate, ** Stove locked in position






Tula stove featured in Charcoal.

THE PERFECT BALANCE OF FORM AND FUNCTION


Compact and easy-to-operate, the Tula easily fits into any living space and lifestyle. A unique glass frame offers a large viewing area. EPA-certified for its clean burn, the Tula produces a clean and efficient flame.



|← 11¾" →|

aiba

Minimum Hearth Protection US/Canada: Ember Protection Only



TULA 8190 FEATURES AND BENEFITS

- Ultra high efficiency of 88% reduces heating costs
- Generous firebox burn 17" logs vertically
- Double steel wall construction reduced clearances, encourages airflow, moves heat throughout home
- Non-catalytic combustion system clean burning, efficient, reduces creosote build-up
- Ash Pan- easy to clean, easily accessible


SPECIFICATIONS

Heats up to	.1,400 sq ft
Firebox Capacity	.1.5 cu ft
Size	.Up to 35,000 BTUs
EPA Certified	.2.6 gph
Efficiency	.88% LHV
Burn Time	.Up to 6 hours
Maximum Log Length	.17″
Flue Exit & Diameter	.Тор - 6″
Ash Pan	.Included
Rear Heat Shield	.Integral
Outside Air Adaptor	.Optional
Actual Weight	.291 lbs
Alcove Certified	Yes
Mobile Home Certified	.Yes





_ -



Single-wall pipe, no rear heat shield		Double-wall pipe, with rear heat shield
А	15″	15″
В	12″	7″
С	201⁄2″	14½"
D	11″	11″
Е	201⁄2"	201⁄2″

MANCHESTER PELLET STOVE




Manchester Pellet stove featured in Brown Majolica Enamel.


FINE-LINED EUROPEAN CAST IRON COMPLEMENTED BY PROVEN TECHNOLOGY

The Manchester Pellet brings you convenience and advanced technology in an attractive Hearthstone cast iron design. With a generous heat output and a low EPA emission rating of 1.3 gph, the Manchester is one of the most efficient and clean burning pellet stoves in the industry.



305/






FINISH OPTIONS:








2" all sides Venting manufacturer's Specification)







MANCHESTER PELLET 8330 FEATURES AND BENEFITS

- High-efficiency tube heat exchanger maximizes heat transfer to your home
- High-quality fans and few moving parts quiet operation
- **Oval burn pot –** creates an unparalleled flame
- Finished firebox interior enhances the flame picture
- Automated control system self adjusts the combustion settings
- Automatic cleaning cycles minimize manual cleaning

SPECIFICATIONS

Heats up to	. 2,000 sq ft
Burn Rate Range	. 1.8 to 6.0 lbs per hour
Size	. 15,300 to 51,000 BTUs
EPA Rating	. 1.3 gph
Efficiency	. 87%
Hopper Capacity	. Up to 60 lbs.
Vent Size	. 3" exit, 4" recommended
Outside Air Inlet	. 2 inch diameter
EZ Comfort Control	. Included
Ash Pan	. Included
Convection Blower	. Included
Electrical Rating	. 120 volts, 60Hz, 4Amps
Actual Weight	. 385 lbs
Alcove Certified	. Yes
Mobile Home Certified	. Yes






	Horizontal Vent	Vertical Vent
А	6″	6″
В	2″	Determined by Vent Manufacturer
С	1″	Determined by Vent Manufacturer





THE ALLURE OF CAST IRON AND STONE IN A HIGH PERFORMANCE PELLET STOVE

The Heritage Pellet offers the convenience and sustainability of pellet burning with exceptional aesthetic appeal. High efficiency performance lowers fuel consumption, while high heat output enables the Heritage Pellet to heat up to 2,000 square feet.



281/4"





HERITAGE PELLET 8091 FEATURES AND BENEFITS

- High-efficiency tube heat exchanger maximizes heat transfer to your home
- · High-quality fans and few moving parts quiet operation
- Oval burn pot creates an unparalleled flame
- Finished firebox interior enhances the flame picture
- Automated control system self adjusts the combustion settings
- Automatic cleaning cycles minimize manual cleaning

SPECIFICATIONS

Burn Rate Range 1.8 to 6.0 lbs per hour Size 15,300 to 51,000 BTUs EPA Rating 1.3 gph Efficiency 87% Hopper Capacity Up to 50 lbs. Vent Size 3" exit, 4" recommended Outside Air Inlet 2 inch diameter EZ Comfort Control Included Ash Pan Included Convection Blower 120 volts, 60Hz, 4Amps Actual Weight 385 lbs	Heats up to	. 2,000 sq ft
EPA Rating 1.3 gph Efficiency 87% Hopper Capacity Up to 50 lbs. Vent Size 3" exit, 4" recommended Outside Air Inlet 2 inch diameter EZ Comfort Control Included Ash Pan Included Convection Blower Included Electrical Rating 120 volts, 60Hz, 4Amps Actual Weight 385 lbs	Burn Rate Range	. 1.8 to 6.0 lbs per hour
Efficiency	Size	. 15,300 to 51,000 BTUs
Hopper Capacity Up to 50 lbs. Vent Size 3" exit, 4" recommended Outside Air Inlet 2 inch diameter EZ Comfort Control Included Ash Pan Included Convection Blower Included Electrical Rating 120 volts, 60Hz, 4Amps Actual Weight 385 lbs	EPA Rating	. 1.3 gph
Vent Size	Efficiency	. 87%
Outside Air Inlet	Hopper Capacity	. Up to 50 lbs.
EZ Comfort Control Included Ash Pan Included Convection Blower Included Electrical Rating	Vent Size	. 3" exit, 4" recommended
Ash PanIncluded Convection BlowerIncluded Electrical Rating	Outside Air Inlet	. 2 inch diameter
Convection Blower Included Electrical Rating 120 volts, 60Hz, 4Amps Actual Weight	EZ Comfort Control	. Included
Electrical Rating 120 volts, 60Hz, 4Amps Actual Weight	Ash Pan	. Included
Actual Weight	Convection Blower	Included
•	Electrical Rating	. 120 volts, 60Hz, 4Amps
Alexya Cartified	Actual Weight	. 385 lbs
Alcove Certilieu	Alcove Certified	. Yes
Mobile Home Certified Yes	Mobile Home Certified	. Yes






	Horizontal Vent	Vertical Vent
А	6″	6″
В	2″	Determined by Vent Manufacturer
С	1″	Determined by Vent Manufacturer

DEVA CAST IRON WOOD COOKSTOVE



CONTEMPORARY PERFORMANCE

With classic style and radiant heat, the Hearthstone Deva does it all: cooks your food, warms your home, and enhances your kitchen. This wood-fired cookstove features a beautiful cast-iron-withnickel-trim construction and user-friendly controls. Handsome and well-crafted, the Deva evokes memories, nostalgia, and pleasure.






DEVA 8220 FEATURES AND BENEFITS

- 2.47 cubic foot oven (17.25" W x 15"H x 17" D) large enough to cook a 20 pound turkey
- Large window easy to monitor cooking
- Vitreoceramic cook top easy to clean, efficient heat transfer
- Oven temperature control simple operation, easy to control, consistent
- Centrally located thermometer easy visibility, precise temperature control
- Single lever stove control easy operation, consistent performance

SPECIFICATIONS

Firebox Capacity	.1.6 cu ft
Size	.Up to 46,000 BTUs
EPA Rating	.Exempt
Maximum Log Length	.17″
Flue Exit & Diameter	.Top or Rear - 6″
Oven Capacity	.2.5 cu ft
Ash Pan	Included
Actual Weight	.484 lbs

CLEARANCES TO COMBUSTIBLE MATERIALS



	Single wall connector		Double wall connector		
	Top Exit Rear Exit		Top Exit	Rear Exit	
А	10″	4″	4″	4″	
В	10″	4″	4″	4″	
С	16″	16″	14″	16″	
D	21½″	N/A	19½″	N/A	

HEARTHSTONE WOOD COLLECTION | 43



		EQUINOX	MANSFIELD	HERITAGE	PHOENIX	HOMESTEAD
SPECIFICATIONS						
Firebox capacity (1)		4.0 cf	3.2 cf	2.3 cf	2.2 cf	2.0 cf
Maximum log length		25"	21"	21"	21"	21"
Flue exit & diameter		top or rear – 8"	top – 6"	top or rear – 6"	45° – 6"	top or rear – 6"
Ash pan		included	included	optional	included	included
Convection Blower		optional	optional	optional	optional	optional
Mobile-home certified		yes	yes	yes	yes	yes
Alcove certified (2)		yes	yes	yes	yes	yes
Actual weight (lbs)		689	550	475	425	380
Shipping weight (lbs)		774	575	500	470	440
PERFORMANCE						
Emissions		3.1 gph	2.9 gph	2.8 gph	2.4 gph	1.9 gph
Heat output BTUs (3)		120,000	80,000	55,000	60,000	50,000
Efficiency (4)		82%	77.4%	81%	75%	83.5%
Heating capacity up to (5)		3,500 sq. ft.	2,500 sq. ft	1,900 sq. ft.	2,000 sq. ft.	1,800 sq. ft.
Burn time up to		12 hours	10 hours	8 hours	8 hours	8 hours
HeatLife™ up to <mark>(6)</mark>		16 hours	14 hours	12 hours	12 hours	12 hours
CLEARANCES (7)						
Side of stove	S	21" *	18"	17" *	20"	23"
to side wall	D	19" *	18"	15" *	16"	16"
Back of stove	S	21"	19"	16"	25"	26"
to back wall	D	6"	8"	7"	13"	7"
Corner of stove	S	15" *	14"	12" *	18"	18"
to side wall	D	131⁄2" *	14"	11" *	12"	12"
Minimum hearthpad size US inches (9)	2	48" W x 41½" D	34" W x 40" D	47" W x 37 ½" D	42" W x 42" D	41" W x 41" D
Minimum hearthpad size Canada inches (9)		56" W x 48" D	40½" W x 48" D	52½" W x 42" D	42" W x 44" D	41" W x 43" D
Minimum Hearth Protection		R-value 1.0	Ember Protection	Ember Protection	R-value 1.0	Hearthmount 6.6 Freestanding 2.5

	CASTLETON	TRIBUTE	MANCHESTER	SHELBURNE	CRAFTSBURY
SPECIFICATIONS					
Firebox capacity (1)	1.9 cf	1.2 cf	2.9 cf	2.0 cf	1.5 cf
Maximum log length	18"	16"	24"	20"	17"
Flue exit & diameter	top or rear – 6"	top – 6"	top or rear – 6"	top or rear – 6"	top or rear – 6"
Ash pan	no	no	included	included	included
Convection Blower	optional	optional	optional	optional	optional
Mobile-home certified	yes	yes	yes	yes	yes
Alcove certified (2)	yes	yes	yes	yes	yes
Actual weight (lbs)	464	318	515	400	285
Shipping weight (lbs)	500	358	550	425	315
PERFORMANCE					
Emissions	2.7 gph	3.0 gph	3.0 gph	2.1 gph	3.8 gph
Heat output BTUs (3)	45,000	36,000	78,000	60,000	40,000
Efficiency (4)	78%	80%	80%	80%	81%
Heating capacity up to (5)	1,500 sq. ft.	1,000 sq. ft.	2,400 sq. ft.	1,800 sq. ft.	1,300 sq. ft.
Burn time up to	8 hours	5 hours	12 hours	8 hours	6 hours
HeatLife™ up to <mark>(6)</mark>	10 hours	7 hours	14 hours	10 hours	7 hours
CLEARANCES (7)					
Side of stove	S 20"	16 1⁄2"	18" *	18"	14"
to side wall	D 15"	16 1⁄2"	16" * <mark>(8)</mark>	21"	14"
Back of stove	S 18"	19"	16"	24"	18"
to back wall	D 6"	8"	6" <mark>(8)</mark>	12"	6"
Corner of stove	S 10"	17"	9" *	13"	17"
to side wall	D 10"	7"	9" *	6"	10"
Minimum hearthpad size US inches (9)	31½" W x 36½" D	287⁄8" W x 311⁄8" D	48" W x 36¾" D	36" W x 45" D	38½" W x 41" D
Minimum hearthpad size Canada inches (9)	37½" W x 44½" D	38" W x 401⁄8" D	56" W x 44" D	40½" W x 47" D	38½" W x 43" D
Minimum Hearth Protection	Ember Protection	R-value 0.6	Ember Protection	R-value 0.8	Ember Protection

S Single-wall pipe, no heat shield D Double-wall pipe, w/ rear heat shield

* Applies to the side/corner opposite the side load door. If the side door lock kit is installed, side/corner clearance applies to both sides/rear corners.

Note: Always refer to the Hearthstone Owner's Manual and the local authority having jurisdiction in your area for the specific installation requirements for your product.

* Applies to the side/corner opposite the side load door. If the side door lock kit is installed, side/corner clearance applies to both sides/rear corners.




		BARI	LIMA	TULA	MANCHESTER PELLET	HERITAGE PELLET	DEVA
SPECIFICATIONS							
Firebox capacity (1)		1.5 cu. ft	1.5 cu. ft	1.5 cu. ft.	Hopper– 60lbs	Hopper– 50lbs	1.6 cu. ft
Maximum log length		17"	17"	17"	N/A	N/A	17"
Flue exit & diameter		top – 6"	top – 6"	top – 6"	rear – 3"	rear – 3"	top or rear – 6"
Ash pan		included	included	included	included	included	included
Convection Blower		no	no	no	included	included	no
Mobile-home certified		yes	yes	yes	yes	yes no	
Alcove certified (2)		yes	yes	yes	yes	yes no	
Actual weight (lbs)		475	475	291	385	385	484
Shipping weight (lbs)	-		-	-	465	465	-
PERFORMANCE							
Emissions	3.6 gph		3.6 gph	2.6 gph	1.3 gph	1.3 gph	exempt
Heat output BTUs (3)	35,000		35,000	35,000	15,300 - 51,000	15,300 - 51,000	46,000
Efficiency (4)	80%		80%	88%	87%	87%	-
Heating capacity up to (5)	1,400 sq. ft.		1,400 sq. ft.	1,400 sq. ft.	2,000 sq. ft.	2,000 sq. ft.	-
Burn time up to	6 hours		6 hours	6 hours	1.8 – 6.0 lbs/hr	1.8 – 6.0 lbs/hr	-
HeatLife™ up to <mark>(6)</mark>	8 hr (soapstone only)		N/A	N/A	N/A	N/A	N/A
CLEARANCES (7)							
Side of stove to side wall	s	38"	38"	15"	6"	6"	10"
	D	38"	38"	15"	N/A	N/A	4"
Back of stove to back wall	s	17" *	17" *	12"	2"	2"	16"
	D	17" *	17" *	7"	N/A	N/A	14"
Corner of stove to side wall	s	12" **	12" **	11"	1"	1"	-
	D	12" **	12" **	11"	N/A	N/A	-
Minimum hearthpad size US inches (9)	51" W x 39½" D		51" W x 39 ½" D	28¾"W x 31¼"D	34¼"W x 32%"D	31" W x 31" D	56" W x 39¾" D
Minimum hearthpad size Canada inches (9)	55" W x 41½" D		55" W x 41 ½" D	33¾"W x 41¼"D	46¼"W x 44%"D	43" W x 43" D	56" W x 41¾" D
Minimum Hearth Protection		Ember Protection	Ember Protection	Ember Protection	Ember Protection	Ember Protection	R-value 0.9

	CLYDESDALE	MORGAN	MONTGOMERY	
SPECIFICATIONS				
Firebox capacity (1)	2.4 cu. ft.	1.7 cu. ft.	1.7 cu. ft	
Maximum log length	22"-24"	18"	20"	
Flue exit & diameter	top – 6"	top – 6"	top – 6"	
Ash pan	no	no	no	
Convection Blower	included	included	included	
Mobile-home certified	no	no	no	
Alcove certified (2)	no no		no	
Actual weight (lbs)	550	349	400	
Shipping weight (lbs)	585	416	-	
PERFORMANCE				
Emissions	3.2 gph	4.3 gph	4.4 gph	
Heat output BTUs (3)	75,000	40,000	40,000	
Efficiency (4)	79%	79%	77%***	
Heating capacity up to (5)	2,000 sq. ft.	1,200 sq. ft.	1,600 sq. ft.	
Burn time up to	10 hours	8 hours	6 hours	
HeatLife™ up to <mark>(6)</mark>	12 hours	10 hours	N/A	
CLEARANCES (7)				
Door opening to side wall	12"	13"	24"	
Mantel height	50"	55"	58"	
Mantel height w/ shield	34"	43"	N/A	
Minimum fireplace opening	23¼"H x 32½"W x 13"D	21"H x 25"W x 15"D	N/A	
Minimum hearthpad size US inches (9)	38¼" W x 18" D	34" W x 16" D	41¾ W x 16" D	
Minimum hearthpad size Canada inches (9)	38¼" W x 18" D	34" W x 18" D	41¾ W x 18" D	
Minimum Hearth Protection	R-value 1.0	R-value 1.0	R-value 1.0	

S Single-wall pipe, no heat shield D Double-wall pipe, w/ rear heat shield * Stove free to rotate, ** Stove locked in position

- " D
- 'D
- 0
- *** Optimal efficiency. not from LHV test data



(1) The amount and weight of wood contained per cubic foot of firebox volume can vary from 15 to 36 lbs. per cubic foot depending on type of wood, moisture content, packing density, and other factors. As a constant for comparison and test purposes, we are assuming 20 lbs. of seasoned hardwood per cubic foot of firebox volume.

(2) See Owner's Manual for specific alcove clearances and alcove hearthpad requirements.

(3) Heat output will vary depending on frequency of loading, the dryness and quality of wood used, packing density, and other installation variables.

(4) Efficiency measured at lower heating value (LHV).

(5) Heating capacity is an approximation dependent upon type of wood, loading configuration, floor plan, ceiling height, house construction, venting configuration, heat loss, geographic location of home, and other usage and regional variables.

(6) HeatLife[™] is a trademark of Hearthstone Quality Home Heating Products and is defined as the quantity of heat stored within the thermal mass of the stove. Used here, it refers not just to burn time but to total hours of usable heat from a single load of fuel.

(7) Clearances on this page are for reference only. Refer to the Owner's Manual for exact specifications prior to installation.

(8) The Manchester rear heat shield is built in: there is an optional Close Clearance heatshield which may further reduce rear clearances to 6".

(9) See Owner's Manual for specific hearth material and R-value requirements.

Note: Always refer to the Hearthstone Owner's Manual and the local authority having jurisdiction in your area for the specific installation requirements for your product.

Warranty: Hearthstone warrants all its wood and pellet products to the original purchaser for the lifetime of the appliance to be free from defects in material and workmanship, with certain limitations as defined in our Limited Lifetime Warranty policy. See your Hearthstone dealer for complete details and a copy of our warranty policy.





www.hearthstonestoves.com 802.888.5235



Hearthstone Quality Home Heating Products 317 Stafford Avenue Morrisville Vermont 05661 USA

